




SPV 5.1 B [SPV041B02B04AA]

3 PH - 4 poles - 1500 RPM - 220-240/380-415 V - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power factor	Ia/In
48	24	600	220-240/380-415	0,45	Δ 1,38 Y 0,8	1,99	3

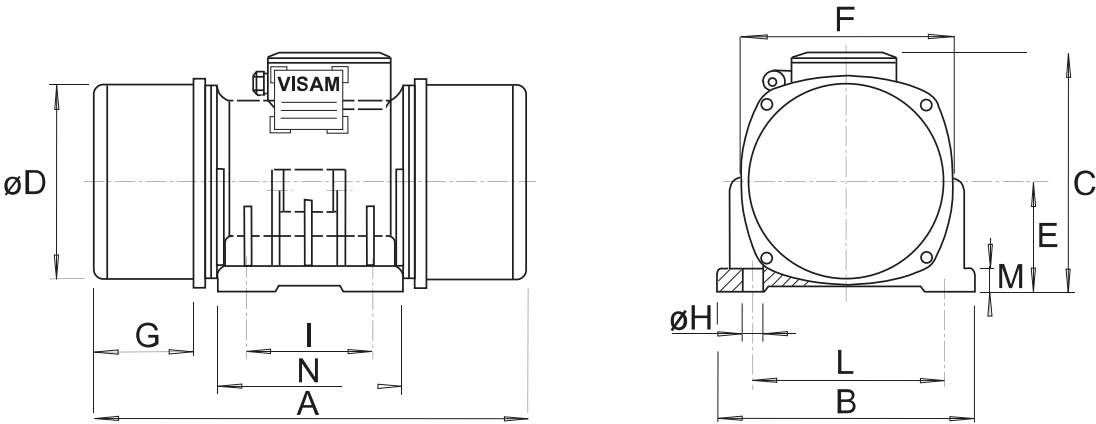

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on “FINDER” app.
Contact us for more information.

OVERALL DIMENSIONS [mm]													
Weight [Kg]	H	I	L	Holes number	A	B	C	D	E	F	G	M	N
23,5	13	100	155	4	406	194	204	148	86	164	101	18	180

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
/	No	M12	13 x 24 mm	80	/	/

BEARINGS LIFE HOURS				
Bearing model	Type	100% C.F	80% C.F	50% C.F
NJ 305		45865	96498	>100000

CERTIFICATION	
Atex II 3D Ex tc IIIC T140°C IP66	

REV.6-05/01/2022

Dimension with coarse degree of accuracy related to UNI 22768/1 Rights reserved to modify technical specifications.

